1. DESCRIPTION

The XL2112 is a high voltage, high speed power MOSFET and IGBT driver with independent high and low side referenced output channels. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction. Logic inputs are compatible with standard CMOS or LSTTL outputs, down to 3.3V logic.

The output drivers feature a high pulse current buffer stage designed for minimum driver cross-conduction. Propagation delays are matched to simplify use in high frequency applications. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high side configuration which operates up to 600 volts.

2. FEATURES

- Floating channel designed for bootstrap operation
- Fully operational to +600V
- Tolerant to negative transient voltage

  dV/dt immune
- Gate drive supply range from 10 to 20V
- Undervoltage lockout for both channels
- 3.3V logic compatible

  Separate logic supply range from 3.3V to 20V

  Logic and power ground ±5V offset
- CMOS Schmitt-triggered inputs with pull-down
- Cycle by cycle edge-triggered shutdown logic
- Matched propagation delay for both channels
- Outputs in phase with inputs
- Package option: XL2112PBF (DIP14),XL2112SPBF(SOP16(W))

3. TYPICAL CONNECTION AND FUNCTIONS

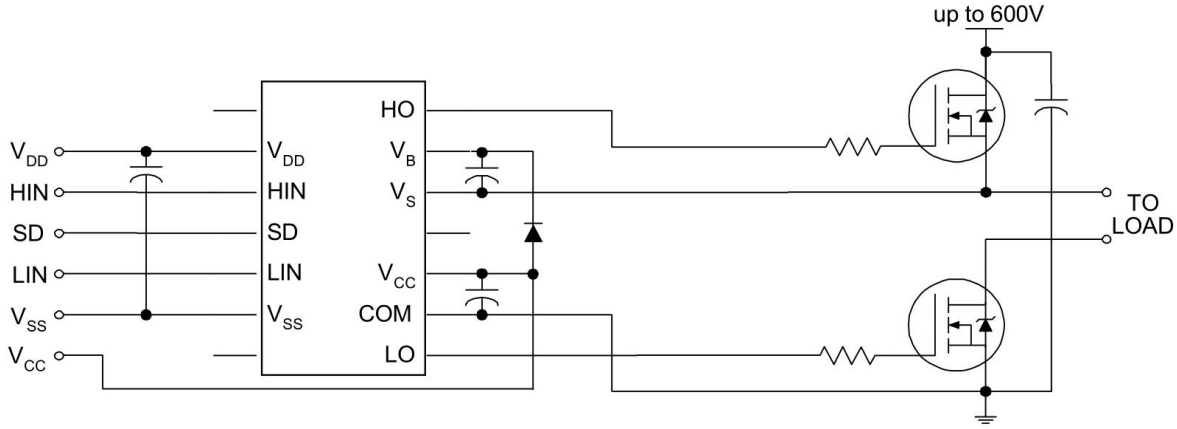

Refer to Lead Assignments for correct pin configuration). This/These diagram(s) show electrical connections only.
Please refer to our Application Notes and DesignTips for proper circuit board layout.

Symbol	Description
V_{DD}	Logic supply
HIN	Logic input for high side gate driver output (HO), in phase
SD	Logic input for shutdown
LIN	Logic input for low side gate driver output (LO), in phase
V_{SS}	Logic ground
V_B	High side floating supply
HO	High side gate drive output
V_S	High side floating supply return
V_{CC}	Low side supply
LO	Low side gate drive output
COM	Low side return

4. BLOCK DIAGRAM

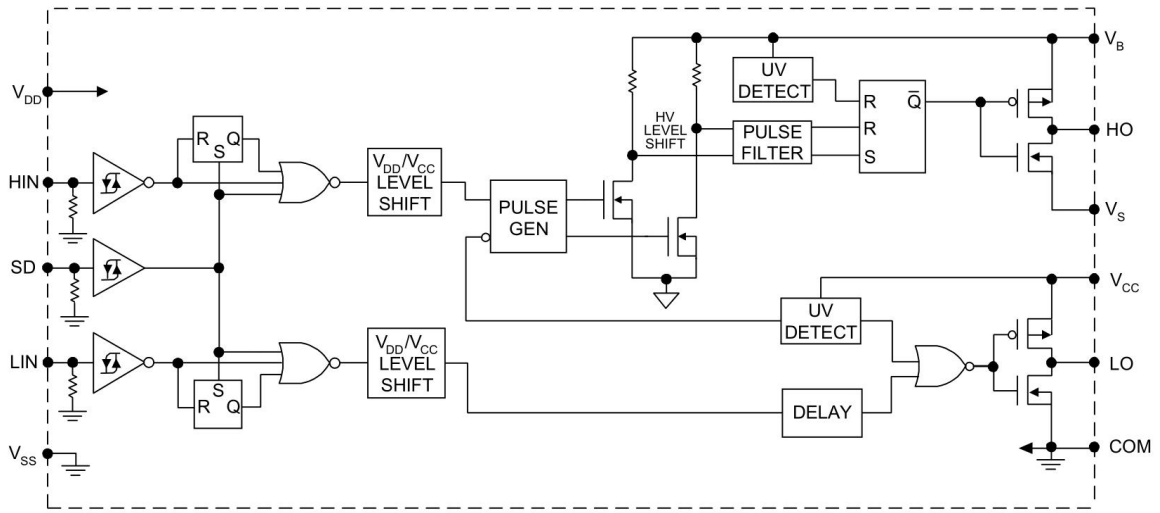

5. ABSOLUTE MAXIMUM RATINGS

Absolute Maximum Ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The Thermal Resistance and Power Dissipation ratings are measured under board mounted and still air conditions. Additional information is shown in Figures 28 through 35.

Symbol	Definition		Min.	Max.	Units
V_B	High Side Floating Supply Voltage		-0.3	625	V
V_S	High Side Floating Supply Offset Voltage		V_B - 25	V_B + 0.3	
V_{HO}	High Side Floating Output Voltage		V_S - 0.3	V_B + 0.3	
V_{CC}	Low Side Fixed Supply Voltage		-0.3	25	
V_{LO}	Low Side Output Voltage		-0.3	V_{CC} + 0.3	
V_{DD}	Logic Supply Voltage		-0.3	V_{SS} + 25	
V_{SS}	Logic Supply Offset Voltage		V_{CC} - 25	V_{CC} + 0.3	
V_{IN}	Logic Input Voltage (HIN, LIN & SD)		V_{SS} - 0.3	V_{DD} + 0.3	
dV_S/dt	Allowable Offset Supply Voltage Transient (Figure 2)		—	50	V/ns
P_D	Package Power Dissipation @ $T_A \leq +25°C$	(14 Lead DIP)	—	1.6	W
		(16 Lead SOIC)	—	1.25	
R_{THJA}	Thermal Resistance, Junction to Ambient	(14 Lead DIP)	—	75	°C/W
		(16 Lead SOIC)	—	100	
T_J	Junction Temperature		—	150	°C
T_S	Storage Temperature		-55	150	
T_L	Lead Temperature (Soldering, 10 seconds)		—	300	

6. RECOMMENDED OPERATING CONDITIONS

The Input/Output logic timing diagram is shown in Figure 1. For proper operation the device should be used within the recommended conditions. The VS and VSS offset ratings are tested with all supplies biased at 15V differential. Typical ratings at other bias conditions are shown in Figures 36 and 37.

Symbol	Definition	Min.	Max.	Units
V_B	High Side Floating Supply Absolute Voltage	V_S + 10	V_S + 20	V
V_S	High Side Floating Supply Offset Voltage	Note 1	600	
V_{HO}	High Side Floating Output Voltage	V_S	V_B	
V_{CC}	Low Side Fixed Supply Voltage	10	20	
V_{LO}	Low Side Output Voltage	0	V_{CC}	
V_{DD}	Logic Supply Voltage	V_{SS} + 3	V_{SS} + 20	
V_{SS}	Logic Supply Offset Voltage	-5 (Note 2)	5	
V_{IN}	Logic Input Voltage (HIN, LIN & SD)	V_{SS}	V_{DD}	
T_A	Ambient Temperature	-40	85	°C

Note 1: Logic operational for V_S of -5 to +600V. Logic state held for V_S of -5V to $-V_{BS}$. (Please refer to the Design Tip DT97-3 for more details).

Note 2: When $V_{DD} < 5V$, the minimum V_{SS} offset is limited to $-V_{DD}$.

7. DYNAMIC ELECTRICAL CHARCATERISTICS

V_{BIAS} (V_{CC}, V_{BS}, V_{DD}) = 15V, C_L = 1000 pF, T_A = 25°C and V_{SS} = COM unless otherwise specified. The dynamic electrical characteristics are measured using the test circuit shown in Figure 3.

Symbol	Definition	Figure	Min.	Typ.	Max.	Units	Test Conditions
t_{on}	Turn-On Propagation Delay	7	—	125	180	ns	V_S = 0V
t_{off}	Turn-Off Propagation Delay	8	—	105	160		V_S = 600V
t_{sd}	Shutdown Propagation Delay	9	—	105	160		V_S = 600V
t_r	Turn-On Rise Time	10	—	80	130		
t_f	Turn-Off Fall Time	11	—	40	65		
MT	Delay Matching, HS & LS Turn-On/Off	—	—	—	30		

8. DSTATIC ELECTRICAL CHARACTERISTICS

V_{BIAS} (V_{CC}, V_{BS}, V_{DD}) = 15V, T_A = 25°C and V_{SS} = COM unless otherwise specified. The V_{IN}, V_{TH} and I_{IN} parameters are referenced to V_{SS} and are applicable to all three logic input leads: HIN, LIN and SD. The V_O and I_O parameters are referenced to COM and are applicable to the respective output leads: HO or LO.

Symbol	Definition	Figure	Min.	Typ.	Max.	Units	Test Conditions
V_{IH}	Logic "1" Input Voltage	12	9.5	—	—	V	
V_{IL}	Logic "0" Input Voltage	13	—	—	6.0		
V_{OH}	High Level Output Voltage, V_{BIAS} - V_O	14	—	—	100	mV	I_O = 0A
V_{OL}	Low Level Output Voltage, V_O	15	—	—	100		I_O = 0A
I_{LK}	Offset Supply Leakage Current	16	—	—	50	μA	V_B = V_S = 600V
I_{QBS}	Quiescent V_{BS} Supply Current	17	—	25	60		V_{IN} = 0V or V_{DD}
I_{QCC}	Quiescent V_{CC} Supply Current	18	—	80	180		V_{IN} = 0V or V_{DD}
I_{QDD}	Quiescent V_{DD} Supply Current	19	—	2.0	5.0		V_{IN} = 0V or V_{DD}
I_{IN+}	Logic "1" Input Bias Current	20	—	20	40		V_{IN} = V_{DD}
I_{IN-}	Logic "0" Input Bias Current	21	—	—	1.0		V_{IN} = 0V
V_{BSUV+}	V_{BS} Supply Undervoltage Positive Going Threshold	22	7.4	8.5	9.6	V	
V_{BSUV-}	V_{BS} Supply Undervoltage Negative Going Threshold	23	7.0	8.1	9.2		
V_{CCUV+}	V_{CC} Supply Undervoltage Positive Going Threshold	24	7.6	8.6	9.6		
V_{CCUV-}	V_{CC} Supply Undervoltage Negative Going Threshold	25	7.2	8.2	9.2		
I_{O+}	Output High Short Circuit Pulsed Current	26	200	250	—	mA	V_O=0V, V_{IN}=V_{DD} PW ≤ 10 μs
I_{O-}	Output Low Short Circuit Pulsed Current	27	420	500	—		V_O = 15V, V_{IN} = 0V PW ≤ 10 μs

9. LEAD ASSIGNMENTS

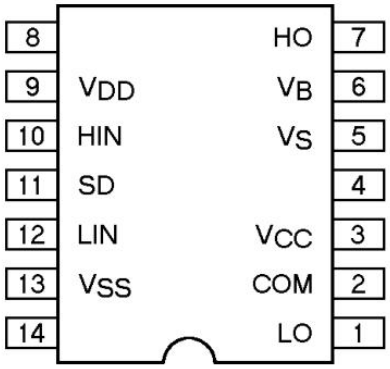

14 Lead DIP
XL2112

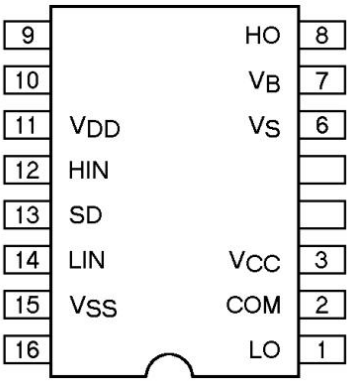

16 Lead SOP16W
(Wide Body)
XL2112

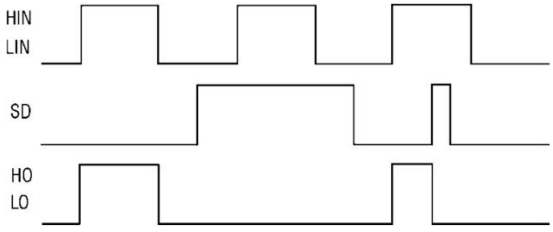

Figure 1. Input/Output Timing Diagram

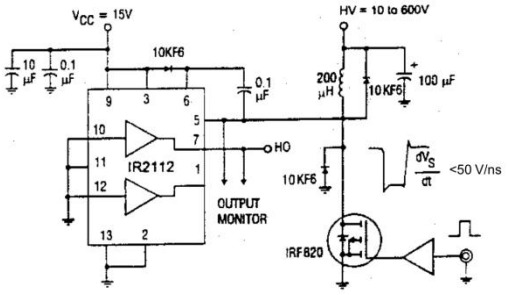

Figure 2. Floating Supply Voltage Transient Test

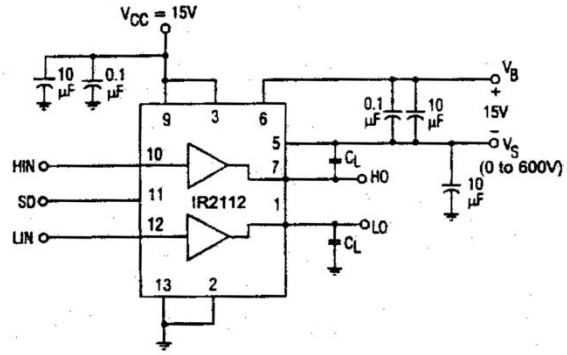

Figure 3. Switching Time Test Circuit

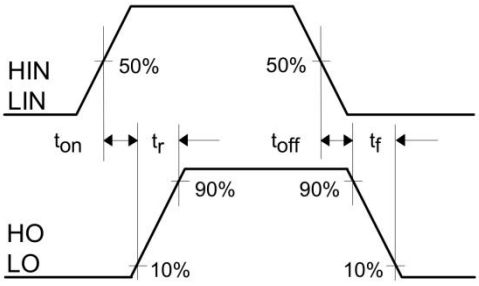

Figure 4. Switching Time Waveform Definition

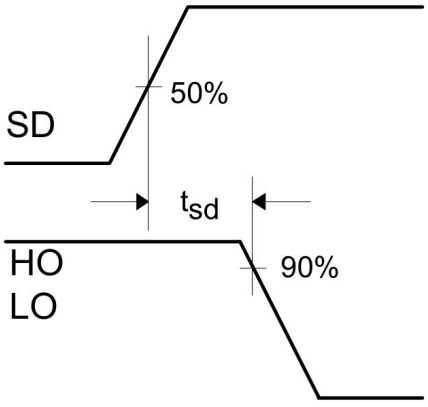

Figure 5. Shutdown Waveform Definitions

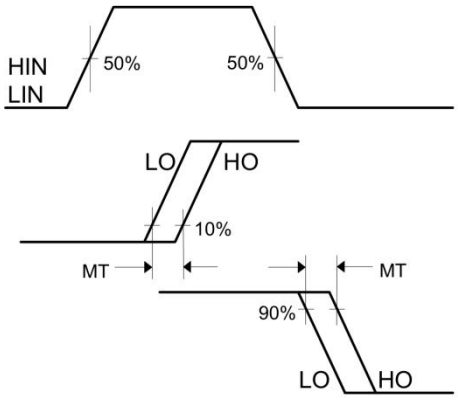

Figure 6. Delay Matching Waveform Definitions

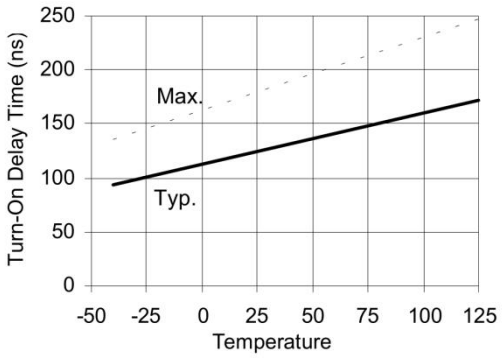

Figure 7A. Turn-On Time vs. Temperature

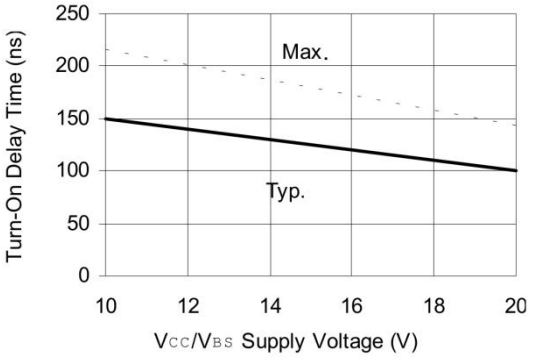

Figure 7B. Turn-On Time vs. V_{CC}/V_{BS} Supply Voltage

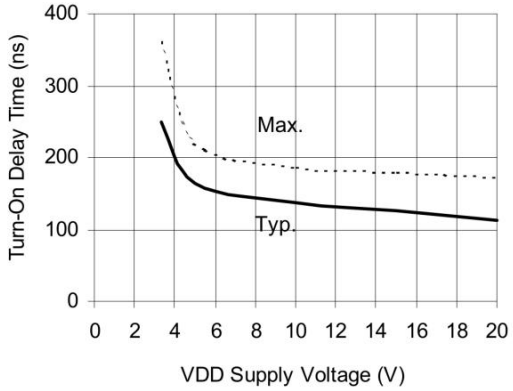

Figure 7C. Turn-On Time vs. V_{DD} Supply Voltage

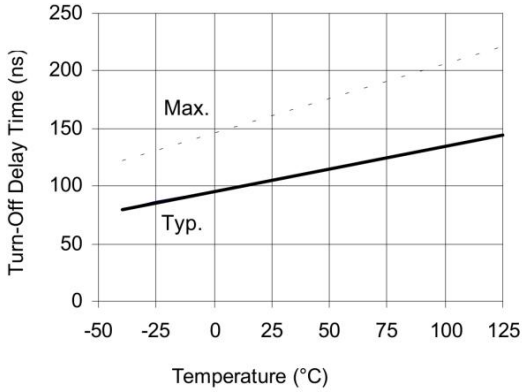

Figure 8A. Turn-Off Time vs. Temperature

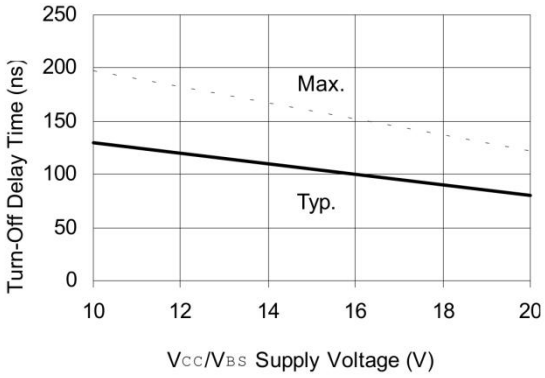

Figure 8B. Turn-Off Time vs. V_{CC}/V_{BS} Supply Voltage

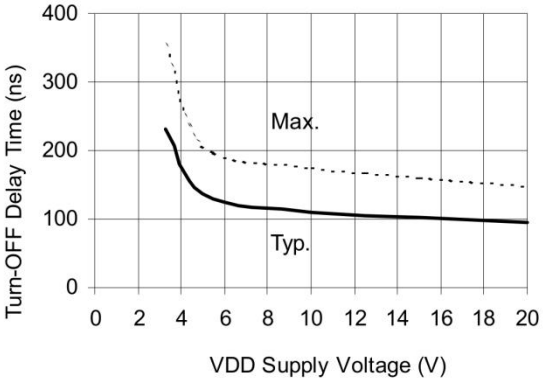

Figure 8C. Turn-Off Time vs. V_{DD} Supply Voltage

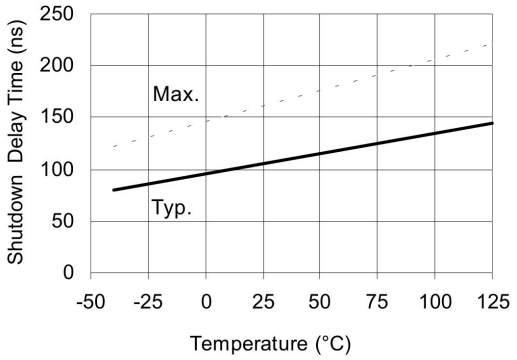

Figure 9A. Shutdown Time vs. Temperature

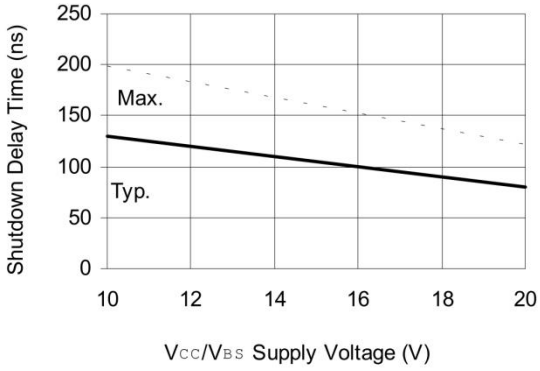

Figure 9B. Shutdown Delay Time vs. V_{CC}/V_{BS} Supply Voltage

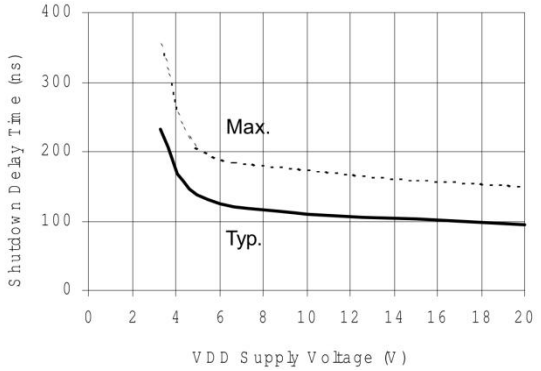

Figure 9C. Shutdown Time vs. V_{DD} Supply Voltage

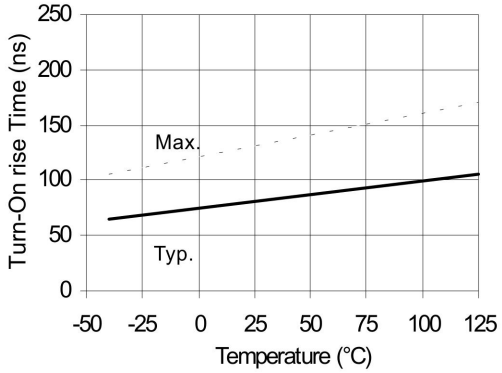

Figure 10A. Turn-On Rise Time vs. Temperature

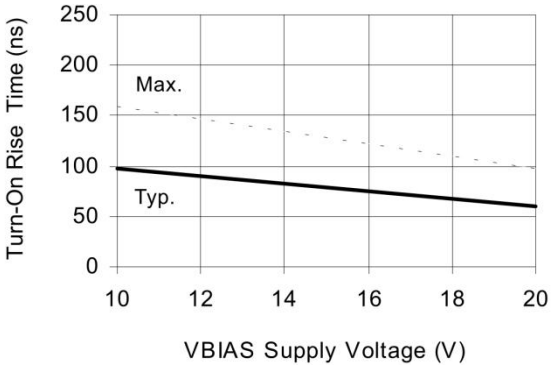

Figure 10B. Turn-On Rise Time vs. Voltage

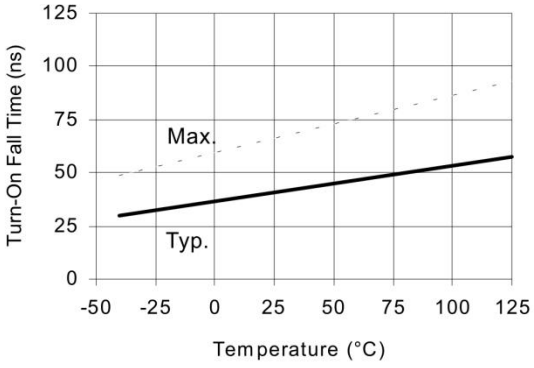

Figure 11A. Turn-On Fall Time vs. Temperature

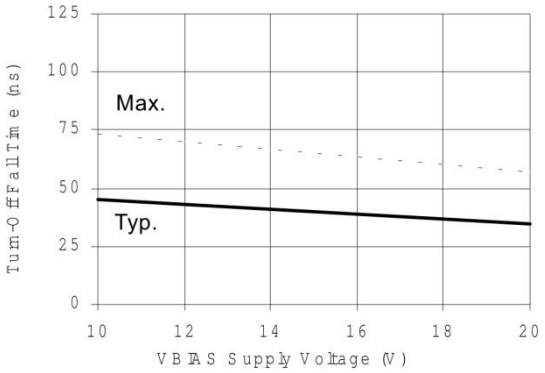

Figure 11B. Turn-Off Fall Time vs. Voltage

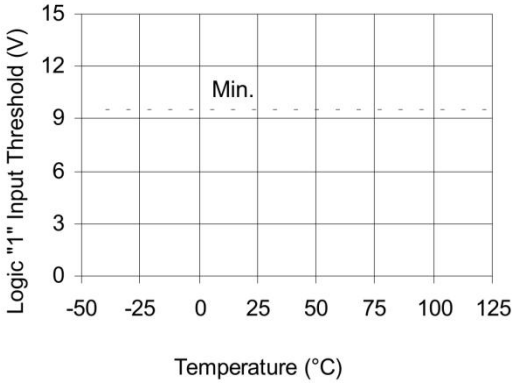

Figure 12A. Logic "I" Input Threshold vs. Temperature

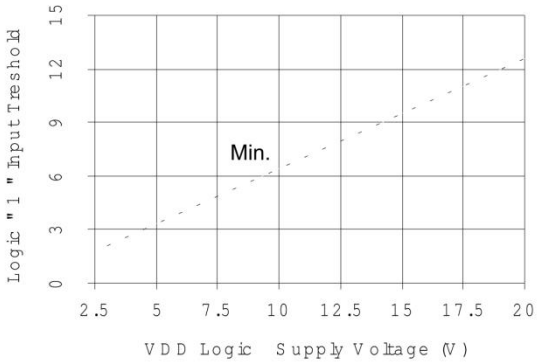

Figure 12B. Logic "I" Input Threshold vs. Voltage

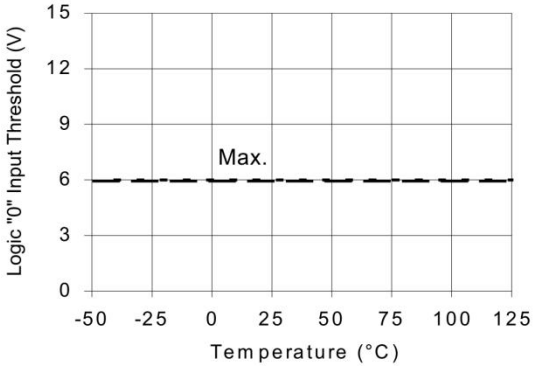

Figure 13A. Logic "0" Input Threshold vs. Temperature

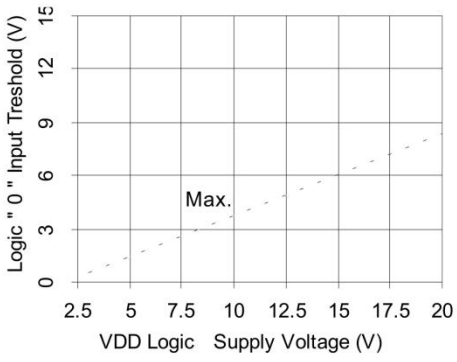

Figure 13B. Logic "0" Input Threshold vs. Voltage

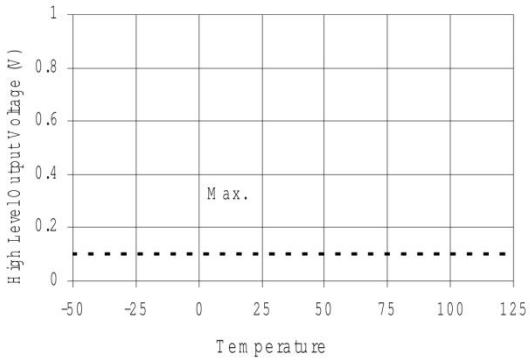

Figure 14A. High Level Output vs. Temperature

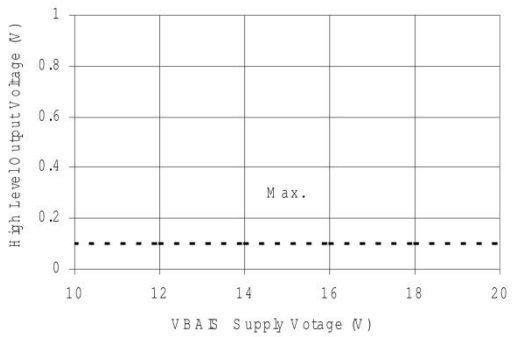

Figure 14B. High Level Output vs. Voltage

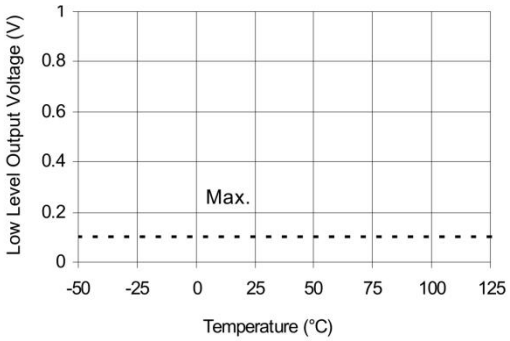

Figure 15A. Low Level Output vs. Temperature

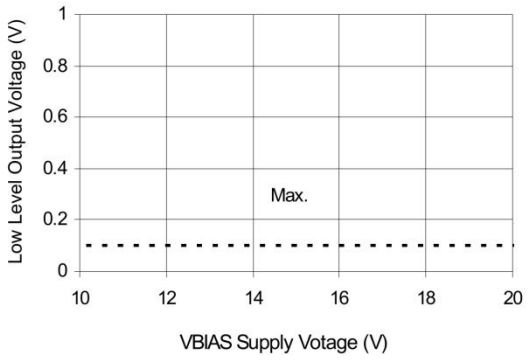

Figure 15B. Low Level Output vs. Voltage

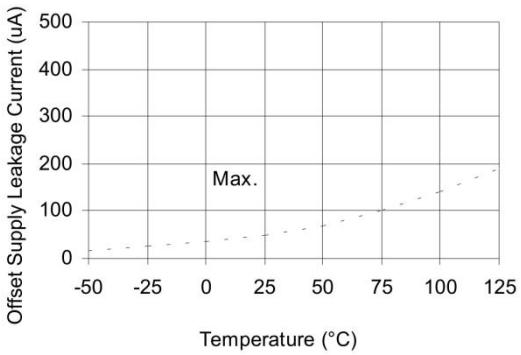

Figure 16A. Offset Supply Current vs. Temperature

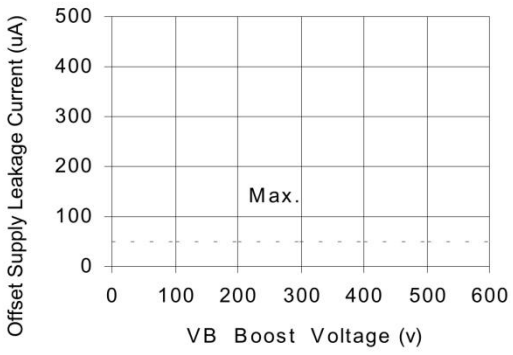

Figure 16B. Offset Supply Current vs. Voltage

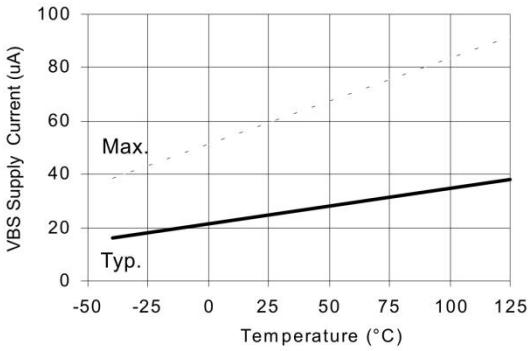

Figure 17A. V_{BS} Supply Current vs. Temperature

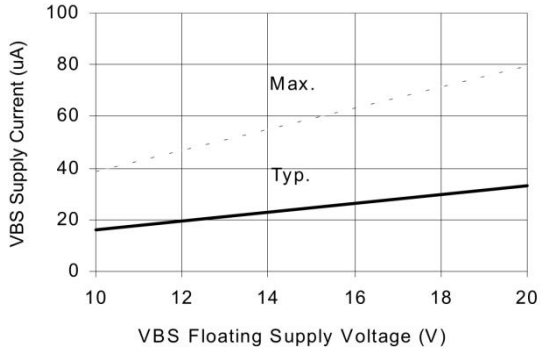

Figure 17A. V_{BS} Supply Current vs. Temperature

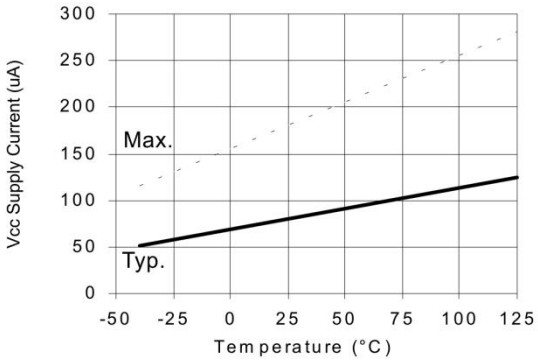

Figure 18A. V_{CC} Supply Current vs. Temperature

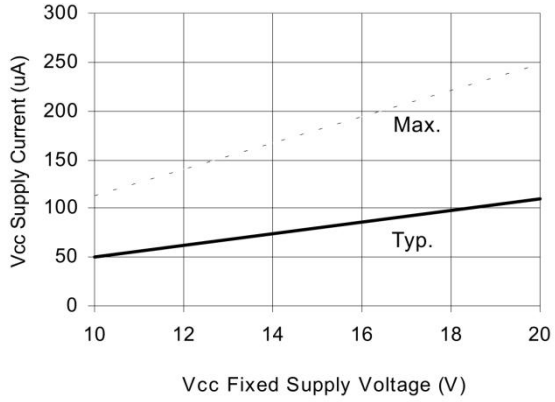

Figure 18B. V_{CC} Supply Current vs. Voltage

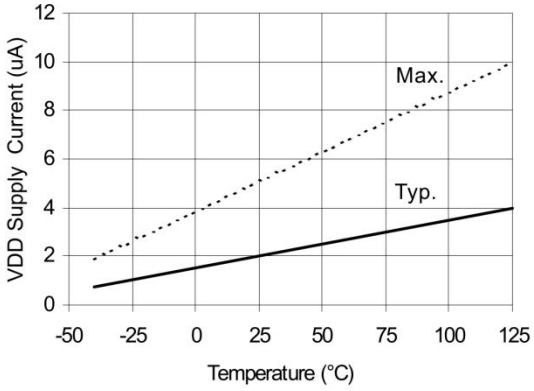

Figure 19A. V_{DD} Supply Current vs. Temperature

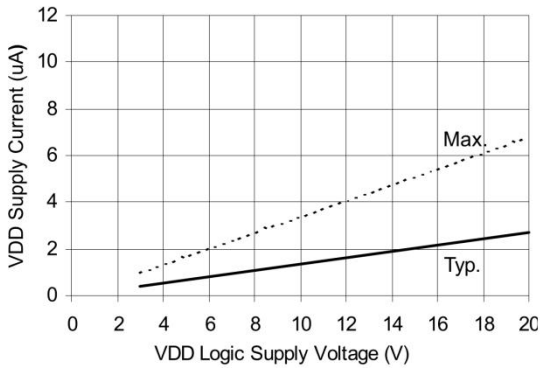

Figure 19B. V_{DD} Supply Current vs. V_{DD} Voltage

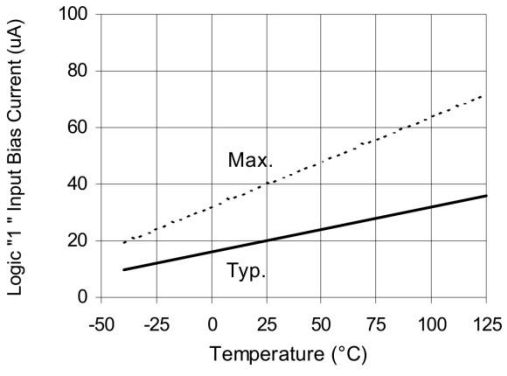

Figure 19B. V_{DD} Supply Current vs. V_{DD} Voltage

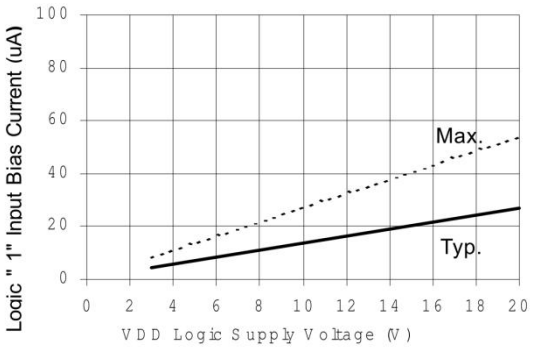

Figure 20B. Logic "1" Input Current vs. V_{DD} Voltage

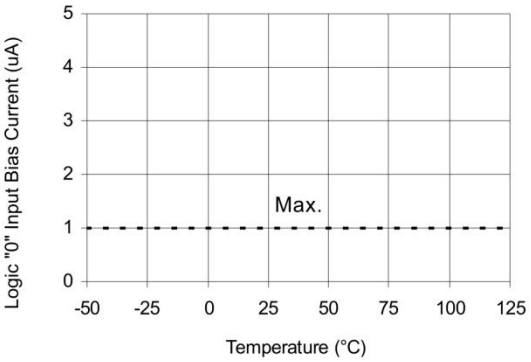

Figure 21A. Logic "0" Input Current vs. Tempera-

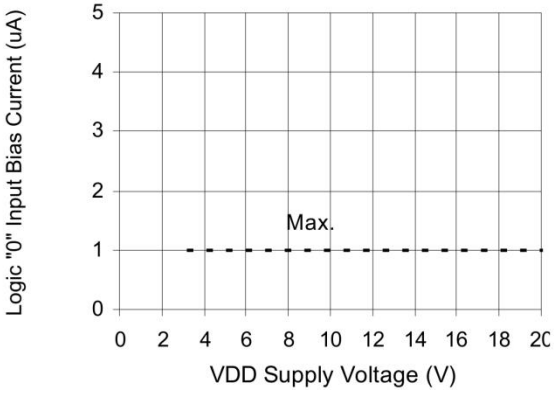

Figure 21B. Logic "0" Input Current vs. V_{DD} Voltage

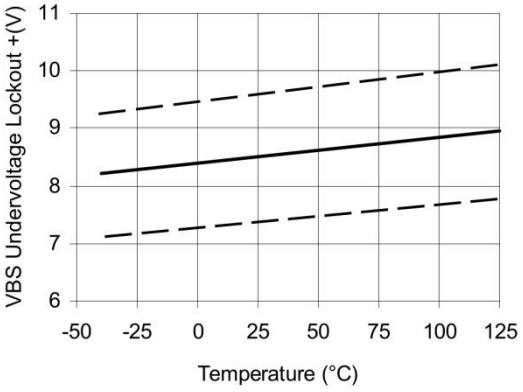

Figure 22. V_{BS} Undervoltage (+) vs. Temperature

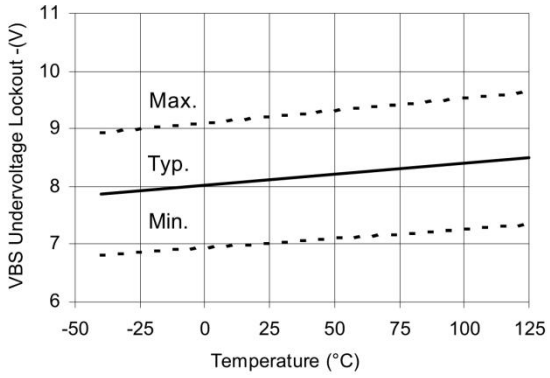

Figure 23. V_{BS} Undervoltage (-) vs. Temperature

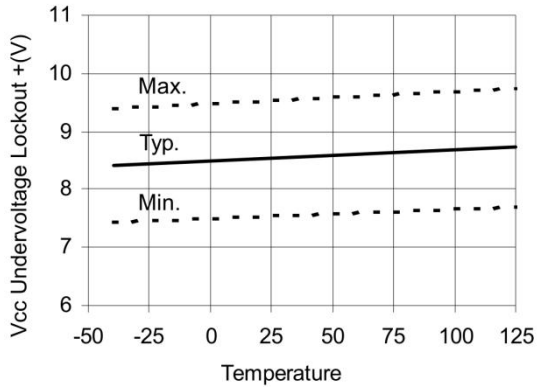

Figure 24. V_{CC} Undervoltage (-) vs. Temperature

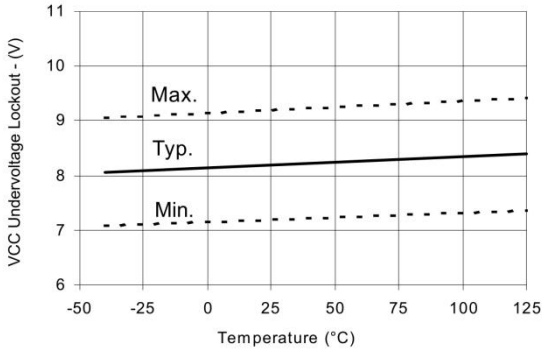

Figure 25. V_{CC} Undervoltage (-) vs. Temperature

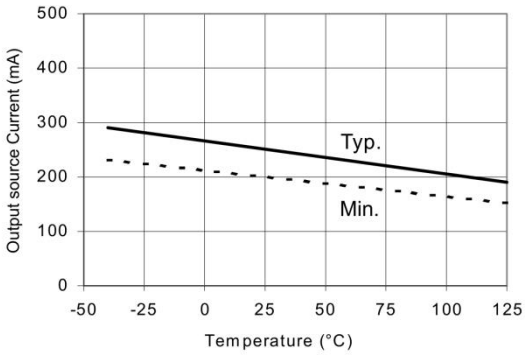

Figure 26A. Output Source Current vs. Temperature

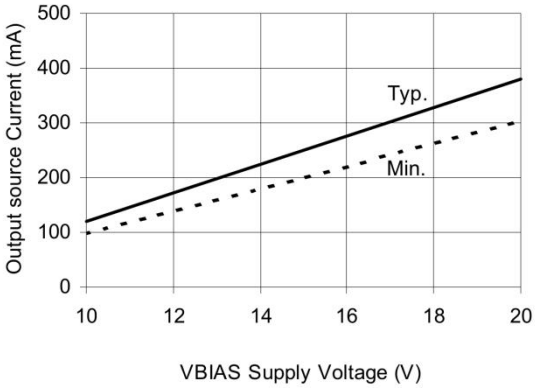

Figure 26B. Output Source Current vs. Voltage

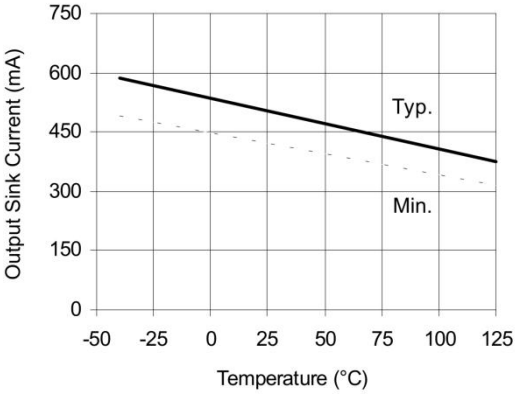

Figure 27A. Output Sink Current vs. Temperature

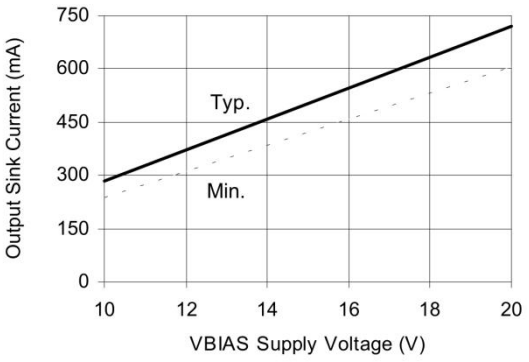

Figure 27B. Output Sink Current vs. Voltage

10. ORDERING INFORMATION

Ordering Information

Part Number	Device Marking	Package Type	Body size (mm)	Temperature (°C)	MSL	Transport Media	Package Quantity
XL2112PBF	XL2112	DIP14	19.05 * 6.35	-40 to 85	MSL3	Tube 25	1000
XL2112SPBF	XL2112S	SOP16(W)	10.45 * 7.5	-40 to 85	MSL3	T&R	1000

11. DIMENSIONAL DRAWINGS

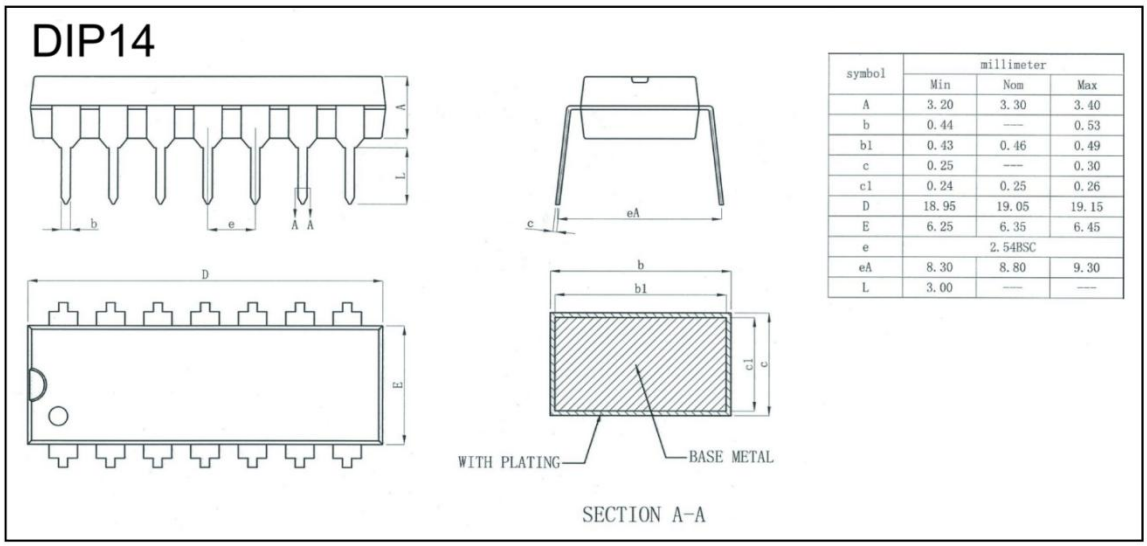

symbol	millimeter		
	Min	Nom	Max
A	3.20	3.30	3.40
b	0.44	——	0.53
b1	0.43	0.46	0.49
c	0.25	——	0.30
c1	0.24	0.25	0.26
D	18.95	19.05	19.15
E	6.25	6.35	6.45
e	2.54BSC		
eA	8.30	8.80	9.30
L	3.00	——	——

SOP16(W)

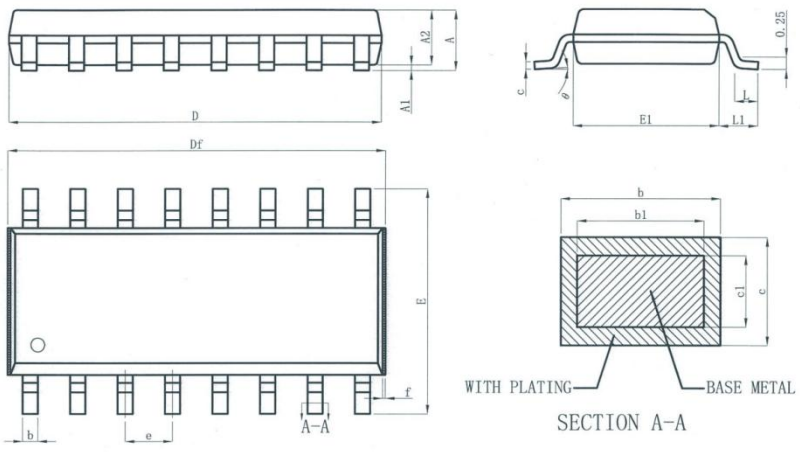

symbol	millimeter		
	Min	Nom	Max
A	----	----	2.65
A1	0.10	0.20	0.30
A2	2.20	2.30	2.40
b	0.39	----	0.47
b1	0.38	0.41	0.43
c	0.25	----	0.30
c1	0.24	0.25	0.26
D	10.10	10.20	10.30
Df	10.20	----	10.70
E	10.26	10.41	10.60
E1	7.40	7.50	7.60
e	1.27BSC		
L	0.55	----	0.85
L1	----	1.40	----
θ	0°	----	8°
f	0.05	----	0.20



[if you need help contact us. Xinluda reserves the right to change the above information without prior notice]