DIO2641B

Low Power, High Speed, Rail-to-Rail Input and Output CMOS Amplifiers

Features

- Rail-to-rail input and output
- Supply voltage range: 2.7 V to 13.2 V
- Supply current (no load): 14 mA
- Low offset voltage: 11 mV (max)
- Output voltage swing 20 mV from rails
- High gain-bandwidth product:
  90 MHz when V+ = 5 V
- Slew rate (A_V = −1): 80 V/μs
- Settling time: 100 ns
- Input voltage noise (100 kHz) 30 nV/√Hz
- Output short protection
- Available package: SOT23-5

Applications

- Portable equipment
- Active filters
- Data acquisition
- Test equipment
- Broadband communication
- Industrial control
- Audio and video processing

Descriptions

The DIO2641B is an amplifier with very low noise, low voltage, and low power operations. The DIO2641B has a high gain-bandwidth product of 90 MHz and exceptionally high output current (approximately 60 mA) at low cost and with reduced power consumption when compared to existing devices with similar performance.

The DIO2641B is designed to provide optimal performance in low voltage and low noise systems. This chip provides rail-to-rail output swing into heavy loads. Fast output slew rate (80 V/μs) ensures large peak-to-peak output swings can be maintained even at higher speeds.

It is specified over the extended industrial temperature range (-40°C to 125°C). The operating range is from 2.7 V to 13.2 V.

Ordering Information

Order Part Number	Top Marking		T_A	Package	
DIO2641BST5	YWDAB	RoHS/Green	-40 to 125°C	SOT23-5	Tape & Reel, 3000

© 2022 DIOO MICROCIRCUITS CO., LTD

Pin Assignments

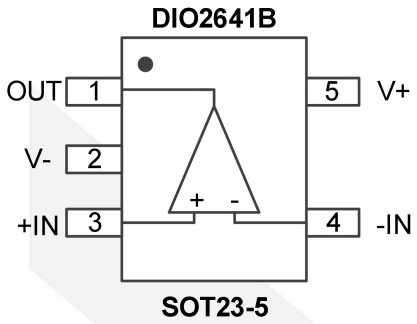

Figure 1. Pin assignment (Top view)

Pin Description

Pin name	Description
V+	Positive supply
V-	Negative supply
+IN	Positive input
-IN	Negative input
OUT	Output
NC	Do not connect

© 2022 DIOO MICROCIRCUITS CO., LTD

Absolute Maximum Ratings

Stresses beyond those listed under the Absolute Maximum Rating table may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Symbol	Parameter	Rating	Unit
V_{CC}	Supply voltage	13.5	V
V_{IN}	Input voltage	(V-)-0.5 to (V+)+0.5	V
T_{STG}	Storage temperature range	-65 to 150	°C
T_J	Junction temperature	150	°C
T_L	Lead temperature range	260	°C
$R_{\theta JA}$	Junction-to-ambient thermal resistance	265	°C/W
ESD	Human body model (HBM), JEDEC JS-001, all pins	8	kV
	Charged device model (CDM), per JEDEC specification JESD22-C101, all pins	2	kV
Latch up		200	mA

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. DIOO does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Rating	Unit
V_{CC}	Supply voltage	2.7 to 13.2	V
T_A	Operating temperature range	-40 to 125	°C

© 2022 DIOO MICROCIRCUITS CO., LTD

3V Electrical Characteristics

Typical value: T_A = 25°C, V+ = 3 V, V− = 0 V, V_{CM} = V+/2, R_L = 2 kΩ to V+/2, unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Power supply						
PSRR	Power supply rejection ratio	V+ = 3.0 V to 3.5 V, V_{CM} = 1.5 V		95		dB
I_S	Supply current	No load		14		mA
Input characteristics						
V_{OS}	Input offset voltage				±9.5	mV
C_{IN}	Common mode input capacitance			6		pF
V_{CM}	Input common-mode voltage range	Low rail		0		V
		High rail		3		
CMRR	Common mode rejection ratio	V_{CM} stepped from 0 V to 1.5 V		90		dB
A_V	Open loop voltage gain	R_L = 2 kΩ to V+ /2		101		dB
$\Delta V_{OS}/\Delta T$	Input offset average drift	Offset voltage average drift determined by dividing the change in V_{OS} at temperature extremes by the total temperature change.		±10		μV/°C
Output characteristics						
I_{SC}	Output short circuit current	Sourcing to V-		60		mA
		Sinking from V+		70		mA
I_{OUT}	Output current	V_{OUT} = 0.5 V from V+		38		mA
		V_{OUT} = 0.5 V from V-		36		mA
V_{OUT}	Output swing high	R_L = 2 kΩ to V+ /2	2.98	2.985		V
	Output swing low	R_L = 2 kΩ to V+ /2			15	mV
Dynamic performance						
BW	−3 dB BW	A_V = +1, V_{OUT} = 200 mV_{PP}		85		MHz
		A_V = +2, V_{OUT} = 200 mV_{PP}		36		MHz
		A_V = −1, V_{OUT} = 200 mV_{PP}		36		MHz
PBW	Full power bandwidth	A_V = +1, −1dB, V_{OUT} = 1 V_{PP}		20		MHz
X_{TALK}	Channel-to-channel crosstalk	f = 80 kHz, receiver: R_F = Rg = 510 Ω, A_V = +2		87		dB
SR	Slew rate	A_V = −1, V_{IN} = 2 V_{PP}		70		V/μs
t_S	Settling time	V_{OUT} = 2 V_{PP}, ±1%, 8 pF load, V_S = 5 V		100		ns
Noise performance						
THD	Total harmonic distortion	f = 1 kHz, V_O = 2 V_{PP}, A_V = −1, R_L = 100 Ω to V+ /2		80		dB

© 2022 DIOO MICROCIRCUITS CO., LTD

		f = 1 kHz, V_{OUT} = 2 V_{PP}, A_V = −1, R_L = 2 kΩ to V+ /2		95		dB
e_n	Input-Referred Voltage Noise	f = 100 kHz		30		nV/√Hz

Specifications subject to change without notice.

5V Electrical Characteristics

Typical value: T_A = 25°C, V+ = 5 V, V− = 0 V, V_{CM} = V+ /2, R_L = 2 kΩ to V+/2, unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Power supply						
PSRR	Power supply rejection ratio	V+ = 4 V to 6 V, V_{CM} = 2.5 V		73		dB
I_S	Supply current	No load		14		mA
Input characteristics						
V_{OS}	Input offset voltage				±11	mV
C_{IN}	Common mode input capacitance			6		pF
V_{CM}	Input common-mode voltage range	Low rail		0		V
		High rail		5		
CMRR	Common mode rejection ratio	V_{CM} stepped from 0 V to 3.5 V		73		dB
A_V	Open loop voltage gain	R_L = 2 kΩ to V+ /2		97		dB
$\Delta V_{OS}/\Delta T$	Input offset average drift	Offset voltage average drift determined by dividing the change in V_{OS} at temperature extremes by the total temperature change.		±10		μV/°C
Output characteristics						
I_{SC}	Output short circuit current	Sourcing to V-		60		mA
		Sinking from V+		70		mA
I_{OUT}	Output current	V_{OUT} = 0.5 V from V+		52		mA
		V_{OUT} = 0.5 V from V-		40		mA
V_{OUT}	Output swing high	R_L = 2 kΩ to V+ /2	4.98	4.985		V
	Output swing low	R_L = 2 kΩ to V+ /2	15	20		mV
Dynamic performance						
BW	−3 dB BW	A_V = +1, V_{OUT} = 200 mV_{PP}		90		MHz
		A_V = +2, V_{OUT} = 200 mV_{PP}		38		MHz
		A_V = −1, V_{OUT} = 200 mV_{PP}		38		MHz
PBW	Full power bandwidth	A_V = +1, −1 dB, V_{OUT} = 2 V_{PP}		20		MHz
X_{TALK}	Channel-to-channel crosstalk	f = 80 kHz, Receiver: R_F = Rg = 510 Ω, A_V = +2		87		dB
SR	Slew rate	A_V = −1, V_{IN} = 2 V_{PP}		80		V/μs

© 2022 DIOO MICROCIRCUITS CO., LTD

t_S	Settling time	V_{OUT} = 2 V_{PP}, ±1%, 8 pF load		100		ns
Noise performance						
THD	Total harmonic distortion	f = 1 kHz, V_O = 2 V_{PP}, A_V = −1, R_L = 100 Ω to V+ /2		80		dB
		f = 1 kHz, V_{OUT} = 2 V_{PP}, A_V = −1, R_L = 2 kΩ to V+ /2		95		dB
e_n	Input-referred voltage noise	f = 100 kHz		30		nV/√Hz

Specifications subject to change without notice.

±5V Electrical Characteristics

Typical value: T_A = 25°C, V+ = 5 V, V− = -5 V, V_{CM} = 0 V, R_L = 2 kΩ to ground, unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Power supply						
PSRR	Power supply rejection ratio	V+ = 4 V to 6 V, V_{CM} = 0 V		85		dB
I_S	Supply current	No load		14		mA
Input characteristics						
V_{OS}	Input offset voltage				±11	mV
C_{IN}	Common mode input capacitance			6		pF
V_{CM}	Input common-mode voltage range	Low rail		-5		V
		High rail		5		
CMRR	Common mode rejection ratio	V_{CM} stepped from 0 V to 3.5 V		85		dB
A_V	Open loop voltage gain	R_L = 2 kΩ		96		dB
$\Delta V_{OS}/\Delta T$	Input offset average drift	Offset voltage average drift determined by dividing the change in V_{OS} at temperature extremes by the total temperature change.		±10		μV/°C
Output characteristics						
I_{SC}	Output short circuit current	Sourcing to V-		60		mA
		Sinking from V+		60		mA
I_{OUT}	Output Current	V_{OUT} = 0.5 V from V+		54		mA
		V_{OUT} = 0.5 V from V-		40		mA
V_{OUT}	Output swing high	R_L = 2 kΩ	4.98	4.985		V
	Output swing low	R_L = 2 kΩ	30			mV
Dynamic performance						
BW	−3 dB BW	A_V = +1, V_{OUT} = 200 mV_{PP}		95		MHz
		A_V = +2, V_{OUT} = 200 mV_{PP}		39		MHz
		A_V = −1, V_{OUT} = 200 mV_{PP}		39		MHz
PBW	Full Power Bandwidth	A_V = +1, −1 dB, V_{OUT} = 2 V_{PP}		20		MHz

© 2022 DIOO MICROCIRCUITS CO., LTD

X_{TALK}	Channel-to-channel crosstalk	f = 80 kHz, receiver: R_F = Rg = 510 Ω, A_V = +2		87		dB
SR	Slew rate	A_V = −1, V_I = 2 V_{PP}		80		V/μs
t_S	Settling time	V_{OUT} = 2 V_{PP}, ±1%, 8 pF load, V_S = 5 V		100		ns
Noise performance						
THD	Total harmonic distortion	f = 1 kHz, V_{OUT} = 2 V_{PP}, A_V = −1, R_L = 100 Ω to V+ /2		80		dB
		f = 1 kHz, V_{OUT} = 2 V_{PP}, A_V = −1, R_L = 2 kΩ to V+ /2		95		dB
e_n	Input-referred voltage noise	f = 100 kHz		30		nV/√Hz

Specifications subject to change without notice.

© 2022 DIOO MICROCIRCUITS CO., LTD

Typical Performance Characteristics

V+ = +5, V− = −5 V, R_F = R_L = 2 kΩ. Unless otherwise specified.

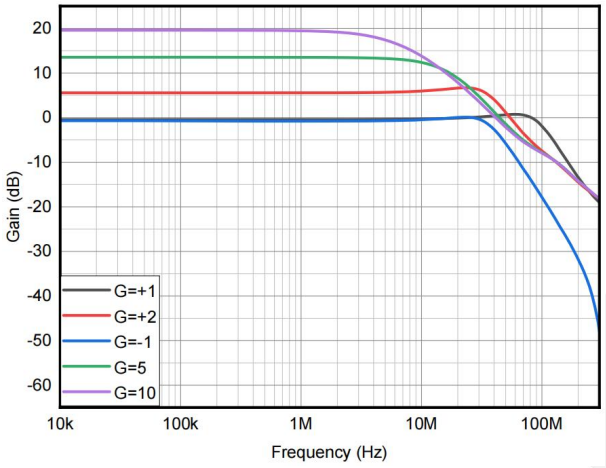

V_{CC} = 3 V, V_{OUT} = 0.2 VPP

Figure 2. Closed loop gain vs. Frequency for various gain

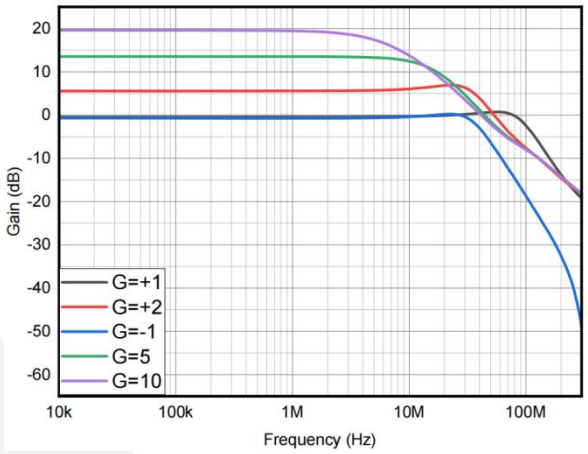

V_{CC} = 5 V, V_{OUT} = 0.2 VPP

Figure 3. Closed loop gain vs. Frequency for various gain

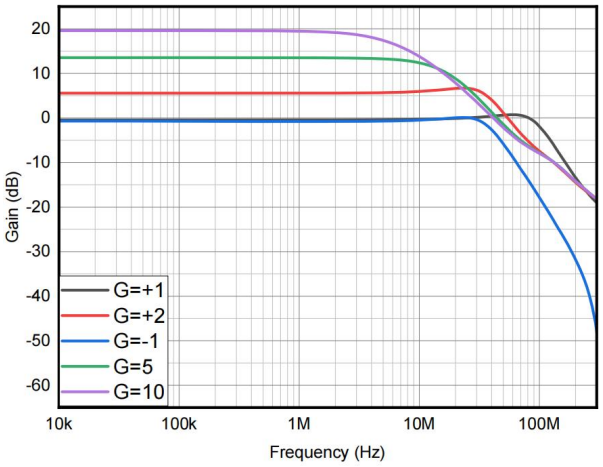

V_{CC} = 10 V, V_{OUT} = 0.2 VPP

Figure 4. Closed loop gain vs. Frequency for various gain

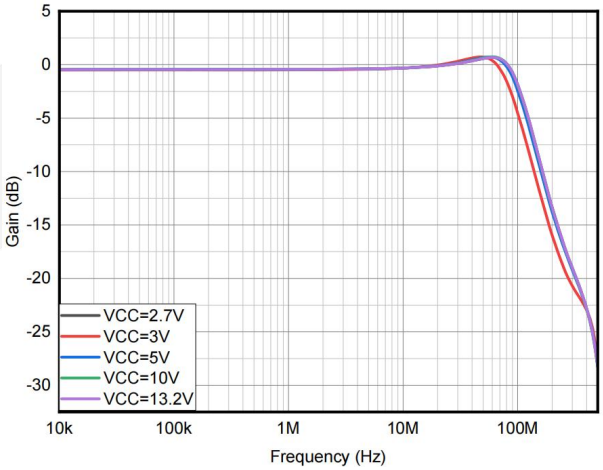

G = +1, V_{OUT} = 0.2 VPP

Figure 5. Closed loop frequency response for various supplies

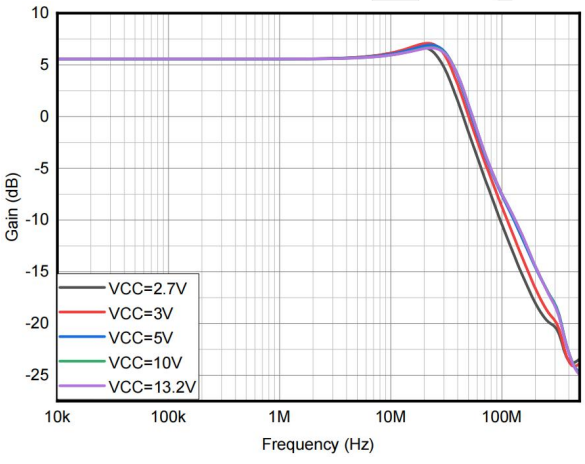

G = +2, V_{OUT} = 0.2 VPP

Figure 6. Closed loop frequency response for various supplies

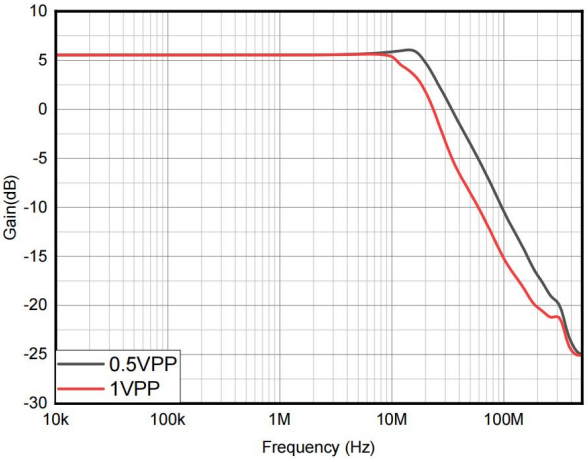

V_{CC} = 10 V, G = +2

Figure 7. Large signal frequency response

© 2022 DIOO MICROCIRCUITS CO., LTD

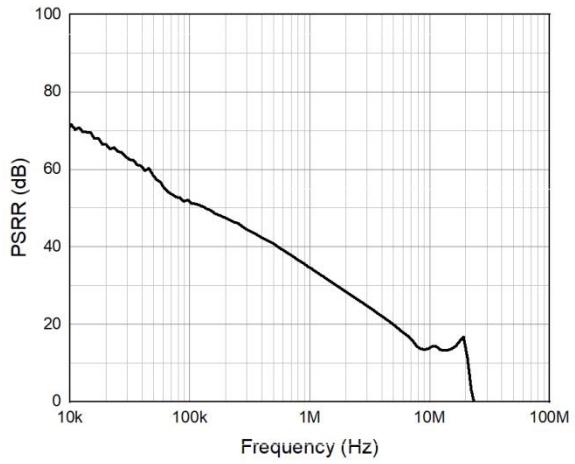

V_S = 5 V, A_V = +1

Figure 8. PSRR vs. Frequency

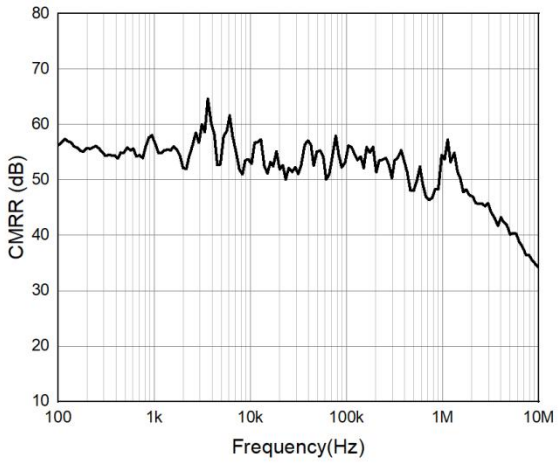

V_S = 5 V, A_V = +2

Figure 9. CMRR vs. Frequency

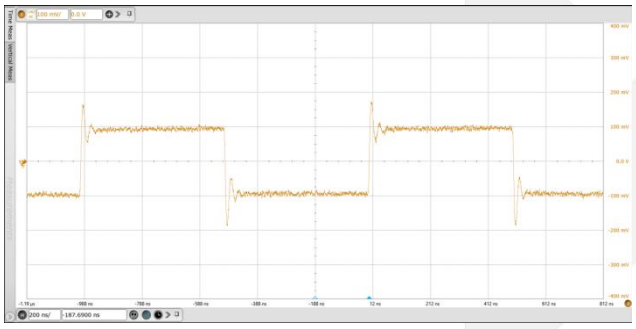

V_{CC} = 3 V, V_{OUT} = 0.2 VPP, G = 2

Figure 10. Small signal step response

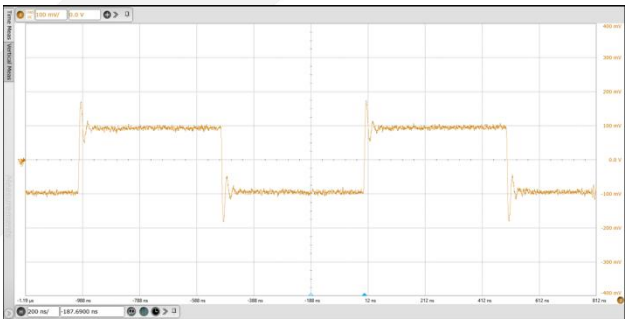

V_{CC} = 10 V, V_{OUT} = 0.2 VPP, G = 2

Figure 11. Small signal step response

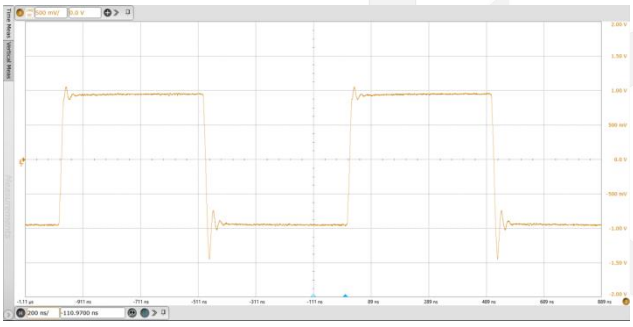

V_{CC} = 10 V, V_{OUT} = 2 VPP, G = 2

Figure 12. Large signal step response

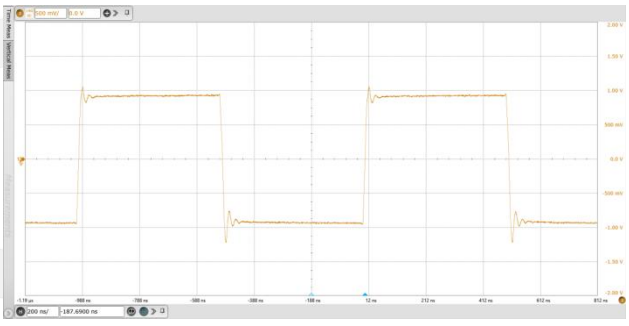

V_{CC} = 10 V, V_{OUT} = 2 VPP, G = -1

Figure 13. Large signal step response

© 2022 DIOO MICROCIRCUITS CO., LTD

Typical Application

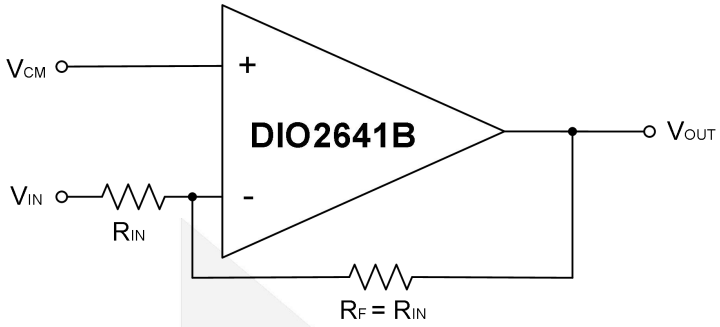

Figure 14. gain = -1

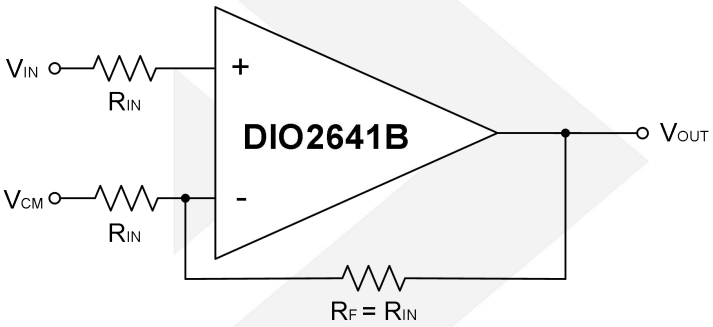

Figure 15. gain = 2

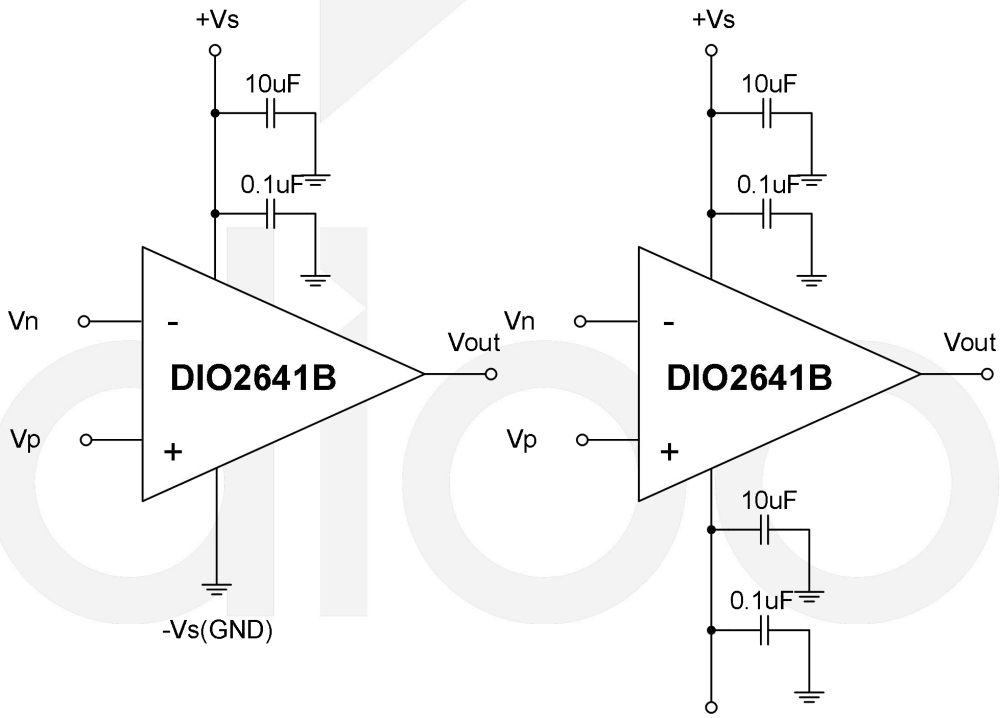

Figure 16. Amplifier with bypass capacitors

© 2022 DIOO MICROCIRCUITS CO., LTD

Feature Description

The DIO2641B is designed for high-voltage, high-speed amplifier applications. The DO2641B has low power dissipation, due to the lower supply current. Push-pull output stage is capable of 50 mA output current (at 0.5 V from the supply rails) while the device consumes only 14 mA of total supply current. As high-performance devices, due to the subtleties of applications, it is recommended to evaluate performance under actual operating conditions to ensure the chip meets all specifications.

As a rail-to-rail output Op Amp, the DIO2641B has a wide power supply voltage range from 2.7 V to 13.2 V. Even when the device is supplied with 3 V, the -3 dB BW (at A_V = +1) is typically 90 MHz. Production testing guarantees that process variations will not compromise the speed.

The DIO2641B device can operate off a single supply or with dual supplies. The input CM capability of the parts (CMVR) extends down to the V- rail to simplify single supply applications. Supplies should be decoupled with low inductance, often ceramic, capacitors to ground less than 0.5 inches from the device pins. The use of ground plane is recommended, and as in most high-speed devices, it is advisable to remove ground plane close to device-sensitive pins such as the inputs.

© 2022 DIOO MICROCIRCUITS CO., LTD

Physical Dimensions: SOT23-5

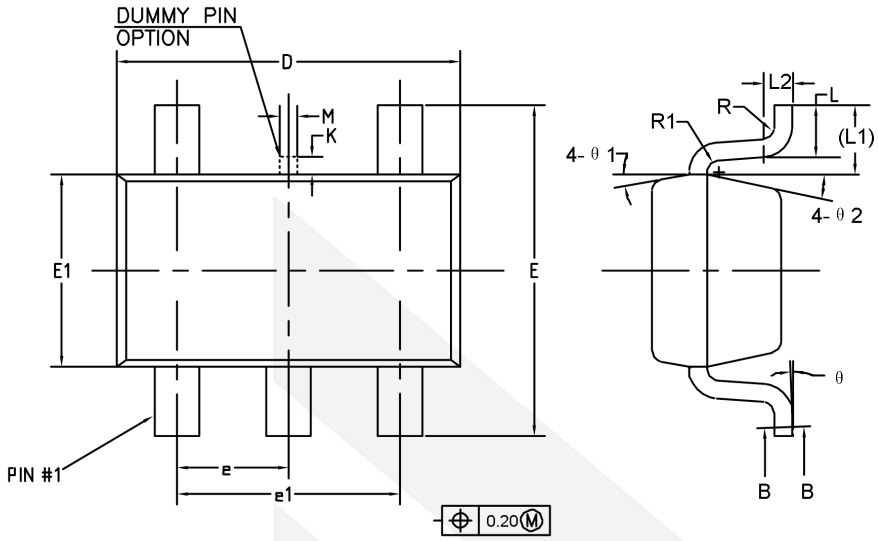

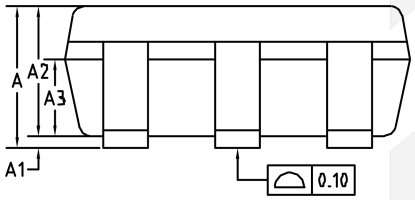

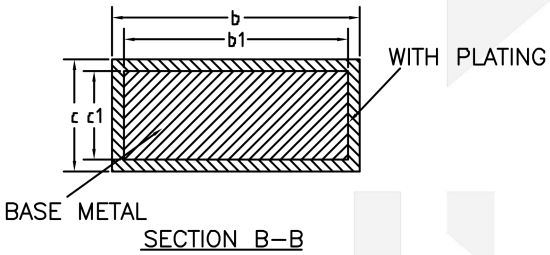

Common Dimensions (Units of measure = mm)			
Symbol	**Min**	**Nom**	**Max**
A	-	-	1.25
A1	0	-	0.15
A2	1.00	1.10	1.20
A3	0.60	0.65	0.70
b	0.36	-	0.45
b1	0.35	0.38	0.41
c	0.14	-	0.20
c1	0.14	0.15	0.16
D	2.826	2.926	3.026
E	2.60	2.80	3.00
E1	1.526	1.626	1.726
e	0.90	0.95	1.00
e1	1.80	1.90	2.00
K	0	-	0.25
L	0.30	0.40	0.60
L1	0.59REF		
L2	0.25BSC		
M	0.10	0.15	0.25
R	0.05	-	0.20
R1	0.05	-	0.20
Θ	0°	-	8°
Θ1	8°	10°	12°
Θ2	10°	12°	14°

© 2022 DIOO MICROCIRCUITS CO., LTD

CONTACT US

Dioo is a professional design and sales corporation for high-quality and performance analog semiconductors. The company focuses on industry markets, such as cell phones, handheld products, laptops, medical equipment, and so on. Dioo's product families include analog signal processing and amplifying, LED drivers, and charger ICs. Go to http://www.dioo.com for a complete list of Dioo product families.

For additional product information or full datasheet, please contact our sales department or representatives.

© 2022 DIOO MICROCIRCUITS CO., LTD