N-Channel Enhancement Mode Power MOSFET

Description


The GT070N15Q uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge. It can be used in a wide variety of applications.

General Features


- V_{DS} 150V
- I_D (at V_{GS} = 10V) 155A
- $R_{DS(ON)}$ (at V_{GS} = 10V) < 5.8mΩ
- 100% Avalanche Tested
- RoHS Compliant

Application

- Power switch
- DC/DC converters



Schematic diagram



TO-247

Ordering Information

Device	Package	Marking	Packaging
GT070N15Q	TO-247	GT070N15	30pcs/Tube

Absolute Maximum Ratings T_C = 25ºC, unless otherwise noted

Parameter		Symbol	Value	Unit
Drain-Source Voltage		V_{DS}	150	V
Continuous Drain Current	T_C = 25ºC	I_D	155	A
	T_C = 100ºC		98	
Pulsed Drain Current (note1)		I_{DM}	620	A
Gate-Source Voltage		V_{GS}	±20	V
Power Dissipation		P_D	330	W
Single pulse avalanche energy （note2）		E_{AS}	420	mJ
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 To 150	ºC

Thermal Resistance

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Ambient	R_{thJA}	55	ºC/W
Thermal Resistance, Junction-to-Case	R_{thJC}	0.38	ºC/W


Specifications T_J = 25ºC, unless otherwise noted

Parameter	Symbol	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
Static Parameters						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D = 250μA	150	--	--	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 150V, V_{GS} = 0V	--	--	1	μA
Gate-Source Leakage	I_{GSS}	V_{GS} = ±20V	--	--	±100	nA
Gate-Source Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250μA	2.0	3.0	4.0	V
Drain-Source On-Resistance	$R_{DS(on)}$	V_{GS} = 10V, I_D = 40A	--	4.6	5.8	mΩ
Forward Transconductance	g_{FS}	V_{GS} = 5V, I_D = 40A	--	46	--	S
Dynamic Parameters						
Input Capacitance	C_{iss}	V_{GS} = 0V, V_{DS} = 75V, f = 0.8MHz	--	5850	--	pF
Output Capacitance	C_{oss}		--	600	--	
Reverse Transfer Capacitance	C_{rss}		--	18	--	
Total Gate Charge	Q_g	V_{DD} = 75V, I_D = 40A, V_{GS} = 10V	--	89	--	nC
Gate-Source Charge	Q_{gs}		--	29	--	
Gate-Drain Charge	Q_{gd}		--	22	--	
Turn-on Delay Time	$t_{d(on)}$	V_{DD} = 75V, I_D = 40A, R_G = 4.7Ω	--	17	--	ns
Turn-on Rise Time	t_r		--	70	--	
Turn-off Delay Time	$t_{d(off)}$		--	47	--	
Turn-off Fall Time	t_f		--	15	--	
Drain-Source Body Diode Characteristics						
Continuous Body Diode Current	I_S	T_C = 25ºC	--	--	155	A
Body Diode Voltage	V_{SD}	T_J = 25ºC, I_{SD} = 40A, V_{GS} = 0V	--	--	1.2	V
Reverse Recovery Charge	Qrr	I_F = 40A, V_{GS} = 0V di/dt=100A/us	--	146	--	nC
Reverse Recovery Time	Trr		--	63	--	ns


Notes

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. EAS condition : Tj=25℃ ,VDD=50V,VGS=10V,L=0.5mH,Rg=25Ω
   The table shows the minimum avalanche energy, which is 1156mJ when the device is tested until failure
3. Identical low side and high side switch with identical R_G


Gate Charge Test Circuit

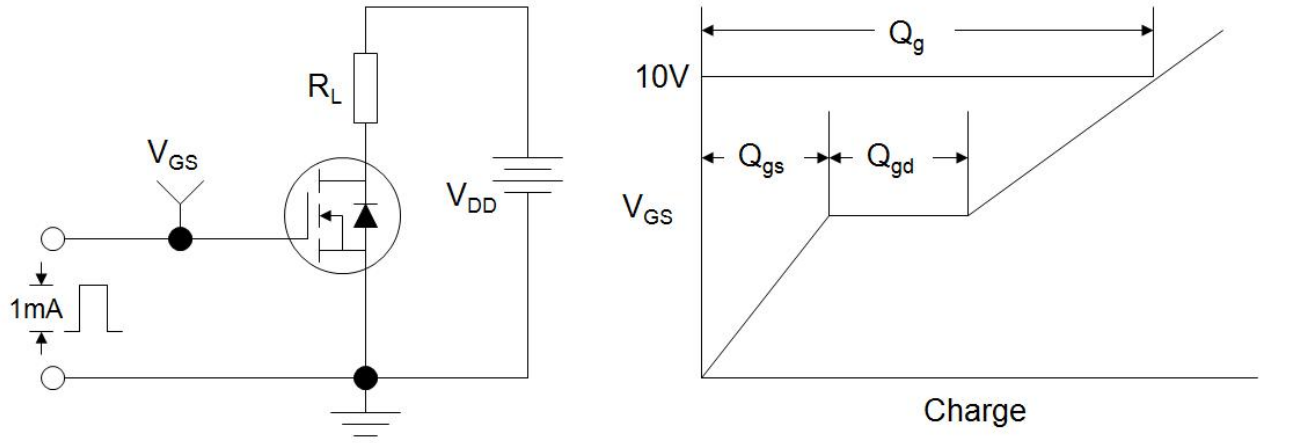

Switch Time Test Circuit

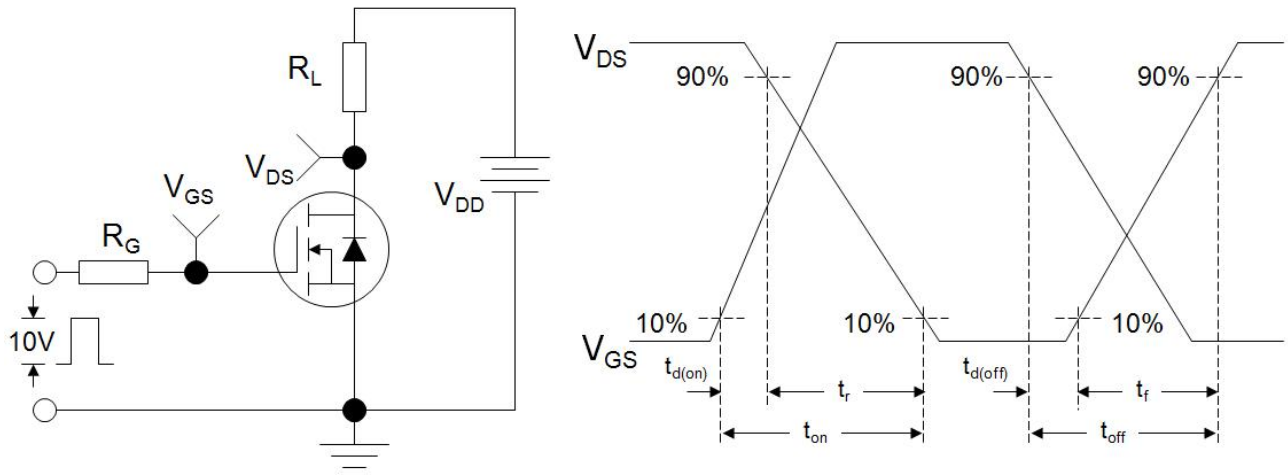

EAS Test Circuit

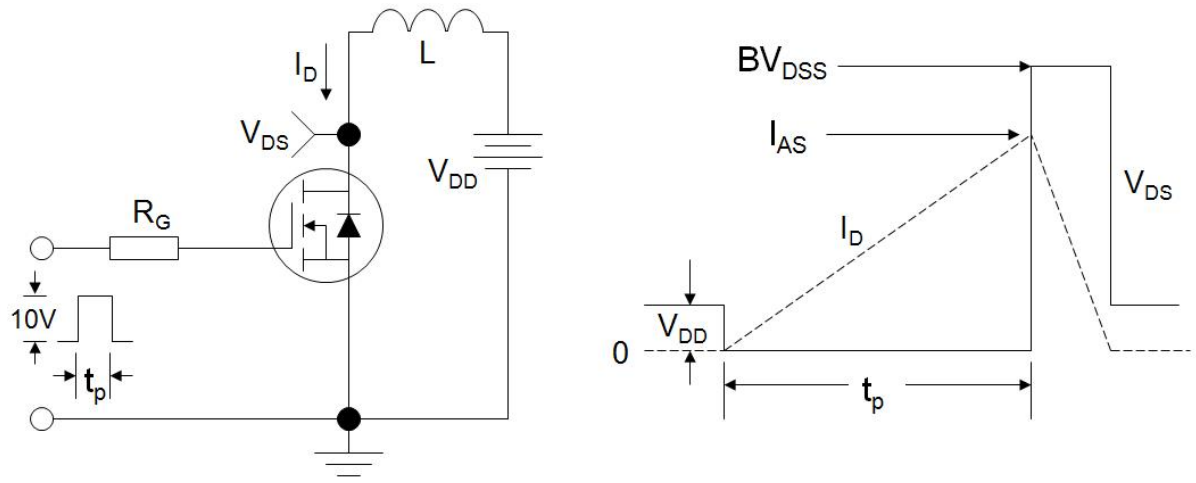

Typical Characteristics T_J = 25ºC, unless otherwise noted

Figure 1. Output Characteristics

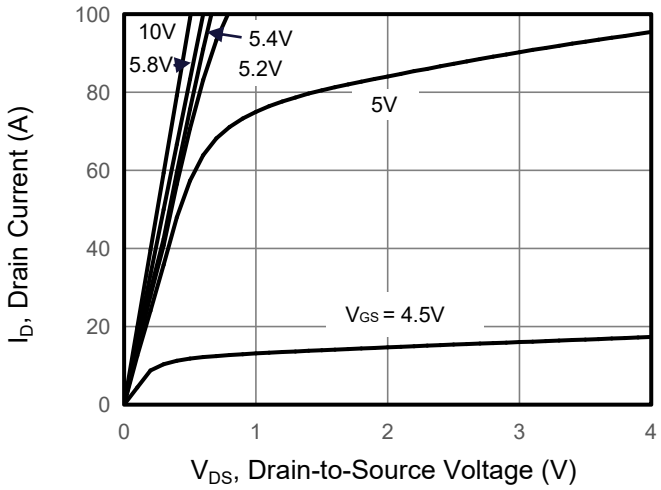


Figure 2. Transfer Characteristics

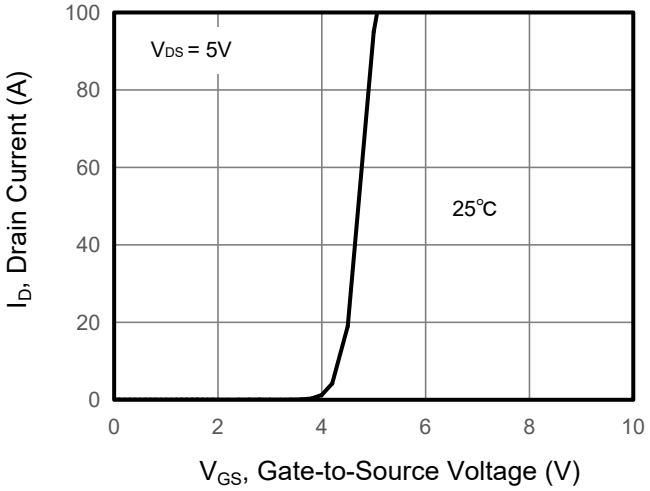


Figure 3. Drain Source On Resistance

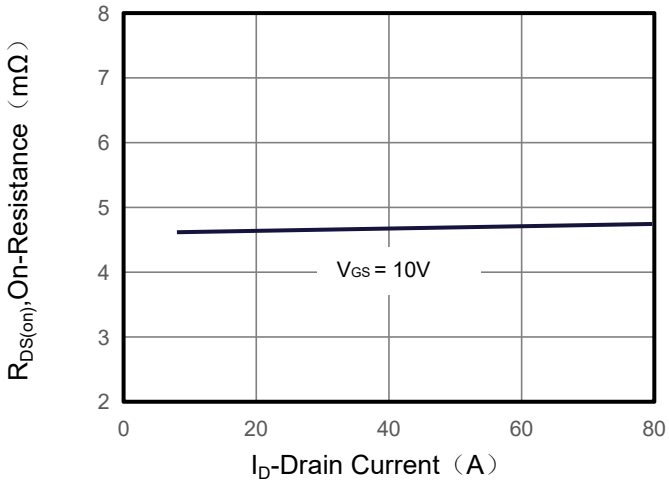


Figure 4. Gate Charge

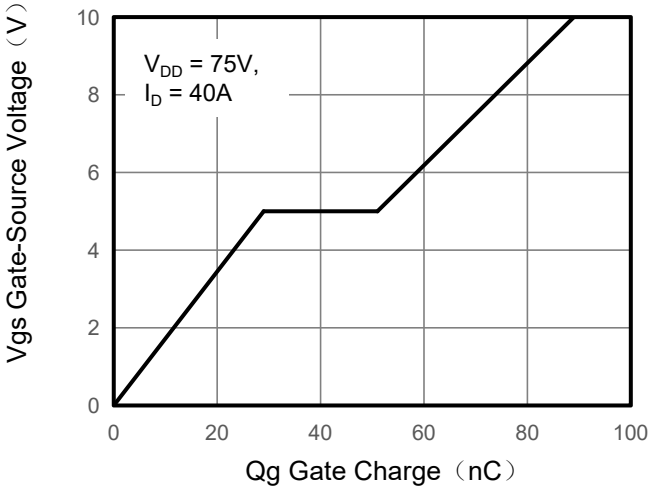


Figure 5. Capacitance


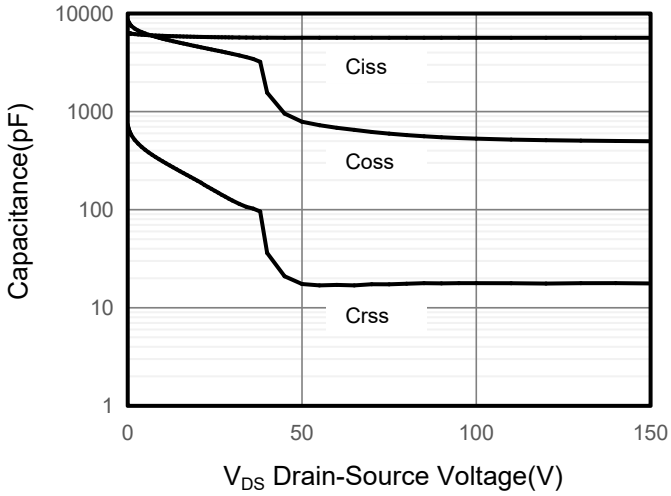


Figure 6. Source-Drain Diode Forward

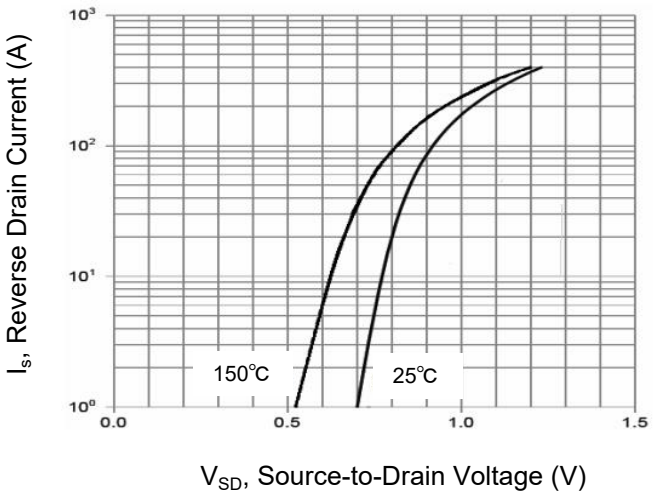

Typical Characteristics T_J = 25ºC, unless otherwise noted

Figure 7. Drain-Source On-Resistance

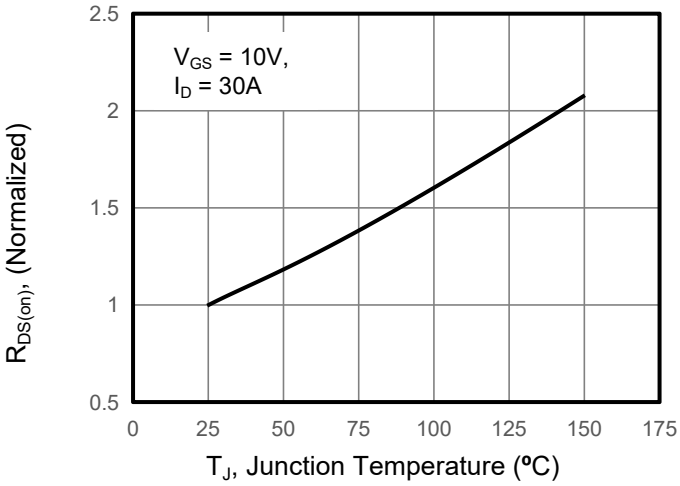


Figure 8. Safe Operation Area

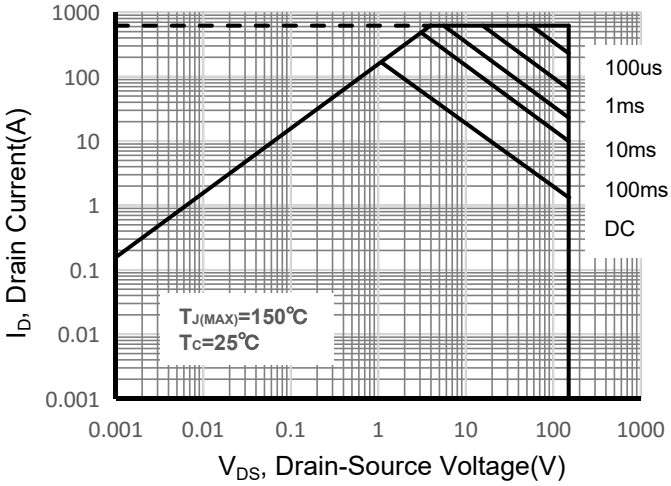


Figure 9. Maximum Continuous Drain Current vs Case Temperature



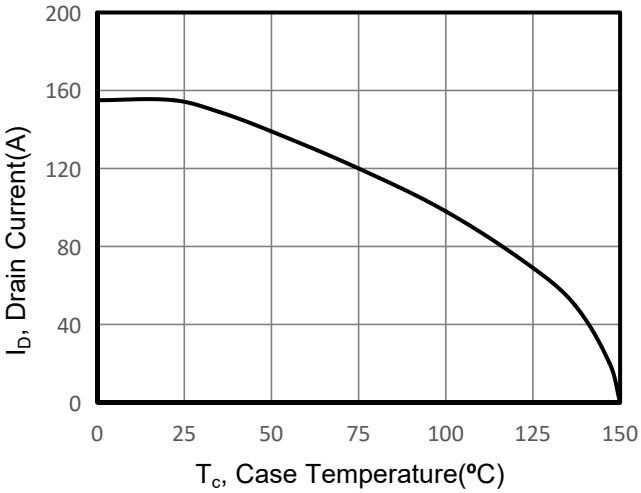



Figure 10. Normalized Maximum Transient Thermal Impedance

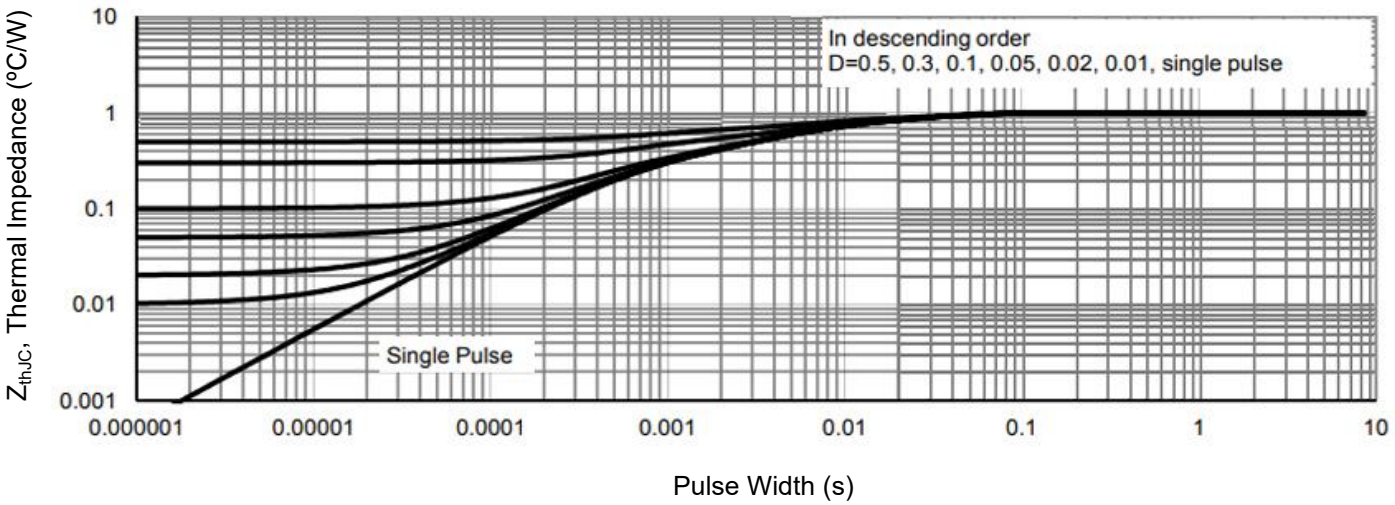


TO-247 Package Information

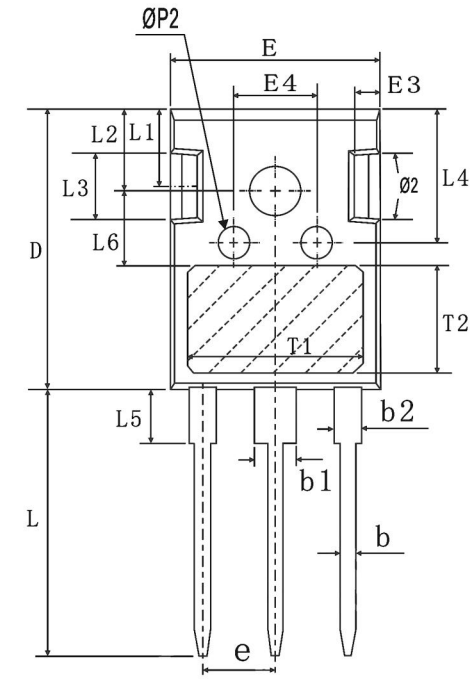

TOP VIEW

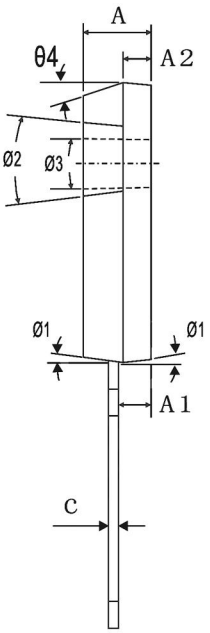

SIDE VIEW

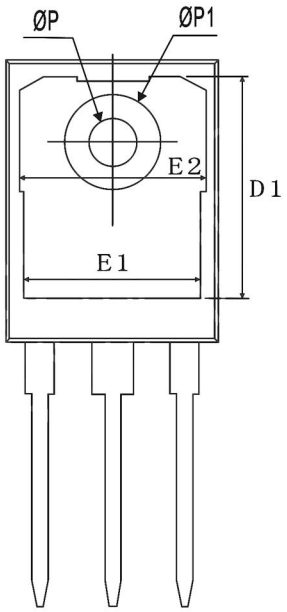

BOTTOM VIEW



SIDE VIEW

COMMON DIMENSIONS
(UNITS OF MEASURE=mm)

SYMBOL	MIN	NOM	MAX
A	4.80	5.00	5.20
A1	2.20	2.40	2.60
A2	1.85	2.00	2.15
b	1.10	1.20	1.30
b1	2.80	3.00	3.20
b2	1.80	2.00	2.20
C	0.52	0.62	0.72
D	20.35	20.65	20.95
D1	16.35	16.55	16.75
E	15.50	15.80	16.10
E1	13.10	13.30	13.50
E2	13.80	14.00	14.20
E3	1.45	1.60	1.75
E4	6.00	6.20	6.40
L	19.80	20.00	20.20
L1	5.88	5.98	6.08
L2	5.88	5.98	6.08
L3	4.90	5.00	5.10
L4	9.70	9.80	9.90
L5	4.10	4.30	4.50
Ø1	4°	7°	10°
Ø2	11°	14°	17°
Ø3	1°	--	2°
Ø4	10°	15°	20°
ØP	3.35	3.60	3.85
ØP1	--	--	7.30
ØP2	2.25	2.50	2.75
e	5.44BSC		
T1	12.80REF		
T2	7.80REF		
L6	5.50REF		